

10/30/00

A

10/27/00
JC955 U.S. PTOIN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

INVENTOR(S) Vivek K. Goyal
Jelena Kovacevic
Francois Masson

CASE 7-16-1

TITLE Methods and Apparatus for Wireless Transmission
Using Multiple Description Coding"Express Mail" Label No. **EF172 352923 225**

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit: **October 27, 2000**Signature: *Lisa M. Hanlin*JC922 U.S. PTO
09/698437
10/27/00ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Enclosed are the following papers relating to the above-named application for patent:

Specification
4 Sheets of informal drawing(s)
Information Disclosure Statement with Form PTO-1449 and cited reference(s)

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	22-20 =	2	x \$18 =	\$36
Independent Claims	2-3 =	0	x \$80 =	\$0
Multiple Dependent Claim(s), if applicable			\$270 =	\$0
Basic Fee				\$710
TOTAL FEE:				\$746

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$746, to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

Please address all correspondence to: **Joseph B. Ryan, Ryan, Mason & Lewis, LLP, 90 Forest Avenue, Locust Valley, New York 11560.** Telephone calls should be made to the under-signed attorney at (516) 759-7517.

Respectfully,

*Joseph B. Ryan*Joseph B. Ryan
Reg. No. 37,922
Attorney for Applicant(s)Date: October 27, 2000
Ryan, Mason & Lewis, LLP
90 Forest Avenue
Locust Valley, New York 11560

**METHODS AND APPARATUS FOR WIRELESS TRANSMISSION
USING MULTIPLE DESCRIPTION CODING**

Field of the Invention

The present invention relates generally to multiple description (MD) coding of data, speech, audio, images, video and other types of signals, and more particularly to wireless transmission techniques for use in conjunction with MD coding of signals.

Background of the Invention

Multiple description (MD) coding is a source coding technique in which multiple bit streams are used to describe a given source signal. Each of these bit streams represents a different description of the signal, and the bit streams can be decoded separately or in any combination. Each bit stream may be viewed as corresponding to a different transmission channel subject to different loss probabilities. The goal of MD coding is generally to provide a signal reconstruction quality that improves as the number of received descriptions increases, without introducing excessive redundancy between the descriptions.

By way of example, two-description MD coding is characterized by two descriptions having rates R_1 and R_2 and corresponding single-description reconstruction distortions D_1 and D_2 , respectively. The single-description distortions D_1 and D_2 are also referred to as side distortions. The distortion resulting from reconstruction of the original signal from both of the descriptions is designated D_0 and referred to as the central distortion. Similarly, the corresponding single-description and two-description decoders are called side and central decoders, respectively. A balanced two-description MD coding technique refers to a technique in which the rates R_1 and R_2 are equal and the expected values of the side distortions D_1 and D_2 are equal.

A well-known MD coding approach known as MD scalar quantization (MDSQ) is described in V.A. Vaishampayan, "Design of multiple description scalar quantizers," IEEE Transactions on Information Theory, Vol. 39, No. 3, pp. 821-834, May 1993, which is incorporated by reference herein. In an example of two-description MDSQ, a given signal sample is quantized using two different scalar quantizers, and each quantizer output is transmitted on a corresponding one of two different channels. If either channel is received by itself, the original signal sample value is known

within a given quantization cell of that channel. If both channels are received, the original value is known within the intersection of its quantization cell in one channel and its quantization cell in the other. In this manner, an MDSQ system provides coarse information to side decoders and finer information to a central decoder.

5 Although these and other MD coding techniques are well known in the art, a need nonetheless exists for improvements in the implementation of MD coding in practical applications, particularly in wireless communication system applications such as frequency hopping wireless systems.

10 **Summary of the Invention**

The present invention provides improved wireless transmission techniques for use in conjunction with multiple description (MD) coding.

15 In accordance with one aspect of the invention, a multiple description coder generates a number of different descriptions of a given portion of a signal in a wireless communication system, using multiple description scalar quantization (MDSQ) or another type of multiple description coding. The different descriptions of the given portion of the signal are then arranged into packets such that at least a first description of the given portion is placed in a first packet and a second description of the given portion is placed in a second packet. Each of the packets are then transmitted using a frequency hopping modulator, and the hopping rate of the modulator is selected or otherwise configured based at least in part on the number of descriptions generated for the different portions of the signal.

20 By way of example, in an illustrative embodiment of the invention in which two descriptions are generated for each portion of the signal, a first description for a current one of the portions of the signal is placed in a current packet along with a second one of the descriptions for a previous portion of the signal. The packet size for the first and second packets is selected as one-half a packet size used for transmission of a single description of the given portion of the signal, and the frequency hopping rate of the modulator is doubled relative to a hopping rate used for single description transmission.

Advantageously, the present invention in the illustrative embodiment does not increase the transmission delay of the system, due to the doubling of the frequency hopping rate. In addition, sending the descriptions for a given portion of the signal in two different packets prevents the loss of both descriptions if only a single packet is lost.

5 The techniques of the invention are particularly well-suited for use in applications such as cordless telephones, but can also be used in other types of wireless systems. In addition, the techniques of the invention are suitable for use in conjunction with signal transmission over many different types of channels, including lossy packet networks such as the Internet as well as broadband ATM networks, and may be used with data, speech, audio, images, video and other types
10 of signals.

Brief Description of the Drawings

FIG. 1 shows an exemplary wireless communication system in accordance with an illustrative embodiment of the invention.

15 FIG. 2 shows a more detailed example of a transmitter portion of the system of FIG. 1 in one application of the present invention.

FIGS. 3A, 3B and 3C illustrate operating parameters of a first example implementation of a multiple description (MD) coder in accordance with the invention.

20 FIGS. 4A, 4B and 4C illustrate operating parameters of a second example implementation of an MD coder in accordance with the invention.

FIG. 5 illustrates an interleaving process implemented in the transmitter of FIG. 2 in accordance with the present invention.

Detailed Description of the Invention

25 The invention will be illustrated below in conjunction with exemplary communication systems which incorporate multiple description (MD) coding. It should be understood that the techniques described may be applied to transmission of a wide variety of different types of signals, including data signals, speech signals, audio signals, image signals, and video signals, in either compressed or uncompressed formats. The term “channel” as used herein refers generally to any

type of communication medium for conveying at least a portion of an encoded signal, and is intended to include a packet or a group of packets. The term “packet” is intended to include any portion of an encoded signal suitable for transmission as a unit over a network or other type of communication medium.

FIG. 1 shows a wireless communication system 100 configured in accordance with an illustrative embodiment of the invention. The system 100 includes a transmitter 102 and a receiver 104 which communicate over one or more wireless channels 106. The transmitter 102 in this illustrative embodiment includes a multiple description-adaptive differential pulse code modulation (MD-ADPCM) coder 110, a Reed-Solomon (RS) coder 112, and a cyclic redundancy check (CRC) coder 114. The receiver 104 includes a CRC decoder 116, an RS decoder 118, and an MD-ADPCM decoder 120, which elements perform operations complementary to those performed by the corresponding elements of the transmitter 102.

In operation, an analog signal to be transmitted through system 100 is sampled and the resulting samples are applied to an input of the MD-ADPCM coder 110. It may be assumed without limitation that the input signal is an audio signal, such as a speech signal generated in a cordless telephone application of the system 100. As noted previously, the invention is applicable to a wide variety of other types of signals. The MD-ADPCM coder 110 generates multiple description bit streams from the signal samples in a manner to be described in greater detail below. The multiple description bit streams are then encoded in coders 112 and 114 for transmission through the wireless channel(s) 106 to the receiver 104. The receiver 104 performs CRC and RS decoding of the received bit streams, and applies the resulting outputs to the MD-ADPCM decoder 120 to reconstruct the original signal samples.

The system 100 is simplified for purposes of clarity of illustration, and may include elements not shown in FIG. 1, such as modulators, demodulators, filters, signal converters, etc. It should also be understood that the arrangement of elements shown in FIG. 1 is by way of example only. The MD coding techniques of the invention may be implemented using many other types and arrangements of elements, as will be apparent to those skilled in the art. For example, it will be appreciated that the invention does not require use of ADPCM.

FIG. 2 shows a more detailed example of a transmitter 102' suitable for use in the system 100. In this example, the transmitter 102' includes the MD-ADPCM coder 110, a (15,11) RS coder 112' and a 16-bit CRC coder 114'. A given packet of audio information applied to the input of the MD-ADPCM coder 110 in this example includes 5 milliseconds of speech, sampled at a rate of 8 kHz, for a total of 40 consecutive samples. The transmitter 102' further adds a number of command bits 122 to the output of the MD-ADPCM coder 110, and a number of framing bits 124 to the output of the 16-bit CRC coder 114'. The particular numbers of command and framing bits per packet are dependent upon the specific implementation of the system, and may be determined in a straightforward manner.

In the illustrative embodiment as shown in FIGS. 1 and 2, it is assumed without limitation that the MD-ADPCM coder 110 is implemented as a modification of an otherwise conventional single description G.726 coder as described in International Telegraph and Telephone Consultative Committee (CCITT) Recommendation G.726, "40, 32, 24, 16 kbit/s Adaptive Differential Pulse Code Modulation (ADPCM)," December 1990, which is incorporated by reference herein. An unmodified conventional single description G.726 coder in the FIG. 2 example would encode each of the 40 consecutive samples of a given 5 millisecond speech segment using 4 bits, and thus operates at a bit rate of 32 kbit/s. The operation of the single description G.726 ADPCM coder is well understood in the art, and described in detail in the above-cited reference, and will therefore not be further described herein.

The operation of the conventional single description ADPCM coder is modified in the illustrative embodiment so as to produce multiple descriptions of each input sample. As a result, the coder uses additional bits and operates with a higher coding rate. In the particular implementations to be described in conjunction with FIGS. 3 and 4 below, the resulting MD-ADPCM coder bit rates are 48 kbit/s and 40 kbit/s, respectively. The multiple descriptions in these implementations of the illustrative embodiment are generated using MD scalar quantization (MDSQ) techniques of a type similar to that described in the above-cited V.A. Vaishampayan reference.

The transmitter 102' of FIG. 2 further includes a frequency hopping modulator 125. The modulator 125 modulates the coded bit streams from CRC coder 114' onto a carrier frequency for transmission over the wireless channel(s) 106. The frequency hopping is used to introduce diversity

into the transmission, and is preferably periodic. For example, consecutive packets may be sent on one of 25 different frequencies $\{f_n\}$, where $n = 1, 2, \dots, 25$. More particularly, a given packet $n + 25 \cdot p$ may be sent on the n th frequency f_n , where $p \geq 0$ is an index denoting a particular frequency hopping period.

5 An aspect of the present invention involves selection of a frequency hopping rate for the modulator 125 so as to support the transmission of the multiple descriptions generated by the MD-ADPCM coder. This aspect of the invention will be described in greater detail in conjunction with FIG. 5.

10 FIGS. 3A, 3B and 3C illustrate operating parameters of the MD-ADPCM coder and decoder in a 48 kbit/s implementation of the illustrative embodiment. In the above-noted 32 kbit/s conventional single description ADPCM coder, a 15-level quantizer is used to quantize a prediction error $d(k)$ for each input sample, as described in the above-cited G.726 Recommendation, and a 4-bit index is used to specify each of the resulting quantization levels. The multiple descriptions of the present invention are generated using the output of the 15-level quantizer and an index assignment table. In this implementation, two descriptions of 3 bits each are generated for every input sample, such that a total of 6 bits are generated for each sample, rather than the 4 bits used in the single description case. This increases the bit rate of the coder from the single description baseline of 32 kbit/s to a multiple description rate of 48 kbit/s.

15 FIG. 3A shows an index assignment table for the 48 kbit/s implementation. In the table, i_1 is the index of the first description, and i_2 is the index of the second description. The values in the cells of the table are the indices of the 15 different levels of the above-noted 15-level quantizer. The levels are arranged in the table using 3-bit two's complement notation, such that $8 < 9 < \dots < 14 < 15 < 1 < 2 < \dots < 6 < 7$.

20 In operation, the above-noted 15-level quantizer generates a particular 4-bit index corresponding to a level associated with the current input sample. That value is used in the MD-ADPCM decoder 110 to determine the index values for the first and second descriptions using an index assignment table, such as the index assignment table of FIG. 3A. For example, if the 15-level quantizer generates as an output the 4-bit index for level 15, the first and second descriptions will be 5 and 4, respectively, as determined from the FIG. 3A table. In the receiver 104, if both

descriptions 5 and 4 are correctly received, the MD-ADPCM decoder uses the index assignment table of FIG. 3A to determine that the quantizer level for the sample is level 15. Therefore, when both descriptions are received, the performance is the same as that resulting in the single description case with correct receipt of the single description. If only one of the descriptions 5 and 4 are received the MD-ADPCM decoder in the receiver can output a coarse approximation of the input sample. More particularly, if the first description 5 is lost and only the second description 4 is correctly received, the decoder can output a midpoint of the levels 14 and 15. Additional details regarding the operation of MDSQ techniques of this type can be found in the above-cited V.A. Vaishampayan reference.

FIGS. 3B and 3C show quantization and inverse quantization of the prediction error for the first and second descriptions, respectively. In the tables, i_1 and i_2 again denote the indices of the respective first and second descriptions, $|I(k)|$ is the bin index of the single description 15-level quantizer, DS is the sign of the prediction error, DLN is the inner value of $\log_2 |d(k)| - y(k)$ in 12-bit two's complement notation, DQS is the sign of the output of a corresponding inverse quantizer, and DQLN is the normalized output in 12-bit two's complement notation. DQS and DQLN represent the output of the inverse quantizer when only the first or second description are received in the MD-ADPCM decoder. W and F denote the values used in quantization scale factor adaptation and adaptation speed control blocks, respectively, of the MD-ADPCM coder and decoder. Finally, $*i$ is the value used in synchronous coding adjustment in the MD-ADPCM decoder. It should be noted that the values shown in italics in the tables are selected for the particular implementation, while all other values are specified in the above-cited G.726 Recommendation.

For each description, considered separately, reconstructed values in the inverse quantization were determined for every index of the description. It was determined experimentally that a suitable approach for determining the inverse quantization was to take for a given description an average of the corresponding two reconstructed values of the single description or "fine" quantization. For example, from FIG. 3A it can be seen that for index 7 of the first description, the corresponding two reconstructed values of the fine quantization are 4 and 5. Other parameters in the tables of FIGS. 3B and 3C were determined as follows:

$$W[|I(k)|] = \min(\text{fine quantization}) + (1/5) \cdot (\max - \min),$$

$FT[|I(k)|] = \max(\text{fine quantization})$, but 6 instead of 7 if the cell of the table corresponds to the two cells in the fine quantization, and

* i = closest index to the center.

5

FIGS. 4A, 4B and 4C illustrate operating parameters of the MD-ADPCM coder and decoder in a 40 kbit/s implementation of the illustrative embodiment. In this implementation, first and second descriptions of 2 and 3 bits, respectively, are generated for every input sample. As a result, a total of 5 bits are generated for each sample, rather than the 4 bits used in the single description case. This increases the bit rate of the coder from the single description baseline of 32 kbit/s to a multiple description rate of 40 kbit/s. In order to have a balance in rate and distortion between the descriptions, the index assignment is configured to alternate on a sample-by-sample basis.

10

FIG. 4A shows an index assignment table for the 40 kbit/s implementation, and FIGS. 4B and 4C show the quantization and inverse quantization of the prediction error for the respective first and second descriptions. The notation in these tables is the same as that previously described in conjunction with FIGS. 3A, 3B and 3C.

15

For the first description, the inverse quantization is again determined as the average of the two values of the fine quantization. Other parameters shown in the table of FIG. 4B for the first description are determined in the same manner as that previously described in conjunction with FIG. 3B for the first description of the 48 kbit/s implementation.

20

For the second description, the inverse quantization is determined as the average of the three or four values of the fine reconstruction. By way of example, with reference to the index assignment table of FIG. 4A, if the first description is lost and the received second description is 4, the inverse quantization is determined as an average of the fine quantization levels 3, 5 and 7 associated with the 15-level quantizer. Other parameters for the second description as shown in the table of FIG. 4C are determined as follows:

25

$W[|I(k)|] = \text{second}(\text{fine quantization}) + (1/5) \cdot (\text{third} - \text{second})$, where the three or four values of the fine quantization are ordered from smallest to largest,

$F[|I(k)|] = \text{average (fine quantization), and}$

$*i = \text{second closest index to the center.}$

As noted previously, in the illustrative embodiment as shown in FIG. 2, the frequency hopping modulator 125 periodically hops in frequency. One possible single description implementation of the modulator 125 in a cordless telephone application hops among 25 different frequencies $\{f_n\}$, where $n = 1, 2, \dots, 25$, using a hopping period of 125 milliseconds. Each 5 millisecond speech segment in such an application is thus sent in a different packet on a different frequency. The modulator 125 thus cycles through the 25 hopping frequencies in each 125 millisecond hopping period in the single description case.

The present invention provides a multiple description interleaving strategy that involves configuring the frequency hopping rate of the modulator 125 for transmission of the previously-described multiple descriptions. In order to avoid an increase in the transmission delay, the frequency hopping rate used for transmission of the multiple descriptions in the illustrative embodiment is doubled relative to the hopping rate used for the above-noted single description implementation. Consecutive input samples are separated into groups of 20 samples. A given packet is generated using the samples associated with a first description of a current 20-sample group and the samples associated with a second description of the previous 20-sample group. Each packet is still transmitted using a particular one of the 25 frequencies, but the packet is configured in the manner described above to include a first description of a current group of samples and a second description of a previous group of samples. In other words, the first description of the current 20-sample group is sent in the current packet, and the second description is delayed and sent with the next packet. The frequency hopping rate is doubled, such that the frequency hopping period for the illustrative embodiment is reduced to 62.5 milliseconds.

The terms “selecting” or “configuring” as used herein with regard to the configuration of the hopping rate of the frequency hopping modulator should not be construed as requiring the use of a modulator with a selectable hopping rate. These terms are intended more generally to encompass any mechanism or technique for establishing a particular hopping rate for a frequency hopping modulator. For example, although the invention can be used in embodiments in which a frequency

hopping modulator has selectable hopping frequencies, it may also be used in embodiments in which the hopping rate is configured during design of the system, based at least in part on the number of descriptions generated in the particular system design, and remains fixed thereafter. The invention thus does not require that a frequency hopping modulator be operable in both a single description and multiple description mode.

FIG. 5 illustrates the above-described interleaving strategy as implemented using the MD-ADPCM coder 110 and the frequency hopping modulator 125 of FIG. 2. A number of 20-sample groups are shown in the figure and are denoted A, B, C, D, etc. As previously noted, each of the 20-sample groups in the illustrative embodiment corresponds to 2.5 milliseconds of speech. For each of the 20-sample groups, two descriptions are generated using the techniques described previously. These two descriptions are denoted for group A as A.1 and A.2, for group B as B.1 and B.2, and so on. A given 2.5 millisecond packet is generated for a current 20-sample group as a combination of the first description for that group and the second description for the previous 20-sample group. For example, the first description B.1 is grouped with the second description A.2 to form a packet, the first description C.1 is grouped with the second description B.2 to form a packet, the first description D.1 is grouped with the second description C.2, and so on.

Advantageously, the interleaving strategy of the present invention as illustrated in FIG. 5 does not increase the transmission delay of the system, due to the doubling of the frequency hopping rate. In addition, sending the descriptions for a given group of samples in two different packets prevents the loss of both descriptions if only a single packet is lost. More particularly, a single packet loss results in the loss of the first description of the current 20-sample group, and the second description of the previous 20-sample group. The decoder in this situation can use the received descriptions from another packet to generate a coarse approximation of the input samples.

It should be noted that the system operating parameters described in conjunction with FIGS. 3, 4 and 5 above are provided by way of example only, and should not be construed as limiting the scope of the invention in any way. For example, the invention can be implemented using more than two descriptions for a given group of samples, and different frequency hopping arrangements.

The MD coding and interleaving operations described above can be implemented in the illustrative embodiment through appropriate modification of one or more functions of the above-

noted conventional single description G.726 ADPCM coder. More particularly, conventional G.726 coder functions as described in the above-cited G.726 recommendation can be modified in the following manner:

1. Function `g726_quant`. This function performs the quantization of $\log_2 |d(k)| - y(k)$. It can be modified in order to output the two descriptions computed using the index assignment table.

2. Function `g726_reconst`. This function computes the inverse quantization. It can be modified to implement the following processes:

(a) If both descriptions are input, the index assignment table is used to find the index of the fine quantizer, and this index is used to output the inverse quantization value (DQS and DQLN).

(b) If only one description is input, this description is used to output the corresponding reconstructed values DQS and DQLN given in FIGS. 3B and 3C for the 48 kbit/s implementation or in FIGS. 4B and 4C for the 40 kbit/s implementation.

(c) If no description is input, a zero is output.

3. Function `g726_funcw`. This function implements the function W , and is modified to handle the same three cases described above for the function `g726_reconst`.

4. Function `g726_funcf`. This function implements the function F , and is modified to handle the same three cases described above for the function `g726_reconst`.

5. Function `g726_sync`. This function implements the synchronous coding adjustment. Since it makes use of the transmitted quantization index $*i$, it is modified to handle the case when only one description is received.

6. Functions `g726_tone` and `g726_trans`. These functions implement a tone and transition detector. The detector is disabled in the illustrative embodiment, since only speech signals are considered. Moreover, disabling the detector tends to lead to better decoding quality.

The illustrative embodiment can be implemented using otherwise conventional processing and memory elements in the multiple description coder 110 and decoder 120. Such elements may include, e.g., a microprocessor, an application specific integrated circuit (ASIC) or another type of digital data processor operating in conjunction with one or more software programs stored in an electronic memory or other storage device. For example, the index assignment tables described

above can be stored in this manner and utilized by a digital data processor to implement the corresponding processing functions.

It should again be emphasized that the above-described embodiment of the invention is intended to be illustrative only. Alternative embodiments of the invention may utilize other system configurations and arrangements of processing elements. For example, the invention does not require the use of ADPCM or any particular type of frequency hopping. Moreover, the invention may be used for a wide variety of different types of input signals, and in numerous multiple description coding applications other than those described herein. These and numerous other alternative embodiments within the scope of the following claims will be apparent to those skilled in the art.

Claims

What is claimed is:

1. A method of processing a signal for transmission in a wireless communication system, the method comprising the steps of:

5 encoding the signal in a multiple description coder which generates a plurality of different descriptions of a given portion of the signal;

 arranging the different descriptions of the given portion of the signal into packets such that at least a first description of the given portion is placed in a first packet and a second description of the given portion is placed in a second packet; and

10 transmitting each of the packets using a frequency hopping modulator, wherein a hopping rate of the modulator is configured based at least in part on a number of descriptions generated for each of a plurality of different portions of the signal.

15 2. The method of claim 1 wherein the multiple description coder comprises a multiple description coder configured to implement multiple description scalar quantization (MDSQ).

 3. The method of claim 1 wherein the multiple description coder comprises a multiple description adaptive differential pulse code modulation (ADPCM) coder.

20 4. The method of claim 1 wherein each of the portions of the signal correspond to a designated segment of the signal having a particular time duration.

 5. The method of claim 1 wherein the signal comprises a speech signal.

25 6. The method of claim 1 wherein the wireless communication system comprises a cordless telephone system.

 7. The method of claim 1 wherein the frequency hopping modulator is configured such that each of the packets is transmitted using a different frequency.

8. The method of claim 1 wherein the hopping rate of the frequency hopping modulator is selected as twice a frequency hopping rate of the modulator used for transmission of a single description of the given portion of the signal.

5 9. The method of claim 1 wherein a packet size for the first and second packets is selected as one-half a packet size used for transmission of a single description of the given portion of the signal.

10 10. The method of claim 1 wherein the encoding step generates two descriptions for each of a plurality of different portions of the signal, with a first one of the descriptions for a current one of the portions of the signal being placed in a current packet along with a second one of the descriptions for a previous portion of the signal.

15 11. The method of claim 1 wherein the hopping rate of the frequency hopping modulator is selected such that a transmission delay of the system is not increased as a result of the transmission of the plurality of descriptions relative to a transmission delay of the system for single description transmission.

20 12. An apparatus for processing a signal for transmission in a wireless communication system, the apparatus comprising:

 a multiple description coder operative to generate a plurality of different descriptions of a given portion of the signal, the different descriptions of the given portion of the signal being arranged into packets such that at least a first description of the given portion is placed in a first packet and a second description of the given portion is placed in a second packet; and

25 a frequency hopping modulator having an input coupled to an output of the multiple description coder and operative to configure the packets for transmission, wherein a hopping rate of the modulator is configured based at least in part on a number of descriptions generated for each of a plurality of different portions of the signal.

13. The apparatus of claim 12 wherein the multiple description coder comprises a multiple description coder configured to implement multiple description scalar quantization (MDSQ).

14. The apparatus of claim 12 wherein the multiple description coder comprises a multiple description adaptive differential pulse code modulation (ADPCM) coder.

15. The apparatus of claim 12 wherein each of the portions of the signal correspond to a designated segment of the signal having a particular time duration.

16. The apparatus of claim 12 wherein the signal comprises a speech signal.

17. The apparatus of claim 12 wherein the wireless communication system comprises a cordless telephone system.

18. The apparatus of claim 12 wherein the frequency hopping modulator is configured such that each of the packets is transmitted using a different frequency.

19. The apparatus of claim 12 wherein the hopping rate of the frequency hopping modulator is selected as twice a frequency hopping rate of the modulator used for transmission of a single description of the given portion of the signal.

20. The apparatus of claim 12 wherein a packet size for the first and second packets is selected as one-half a packet size used for transmission of a single description of the given portion of the signal.

21. The apparatus of claim 12 wherein the multiple description coder generates two descriptions for each of a plurality of different portions of the signal, with a first one of the descriptions for a current one of the portions of the signal being placed in a current packet along with a second one of the descriptions for a previous portion of the signal.

22. The apparatus of claim 12 wherein the hopping rate of the frequency hopping modulator is selected such that a transmission delay of the system is not increased as a result of the transmission of the plurality of descriptions relative to a transmission delay of the system for single description transmission.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

Abstract

A multiple description coder generates a number of different descriptions of a given portion of a signal in a wireless communication system, using multiple description scalar quantization (MDSQ) or another type of multiple description coding. The different descriptions of the given portion of the signal are then arranged into packets such that at least a first description of the given portion is placed in a first packet and a second description is placed in a second packet. Each of the packets are then transmitted using a frequency hopping modulator, and the hopping rate of the modulator is selected or otherwise configured based at least in part on the number of descriptions generated for the different portions of the signal. For example, in an embodiment in which two descriptions are generated for each portion of the signal, a first description for a current one of the portions of the signal is placed in a current packet along with a second one of the descriptions for a previous portion of the signal, and the frequency hopping rate of the modulator is doubled relative to a hopping rate used for single description transmission.

1/4

100

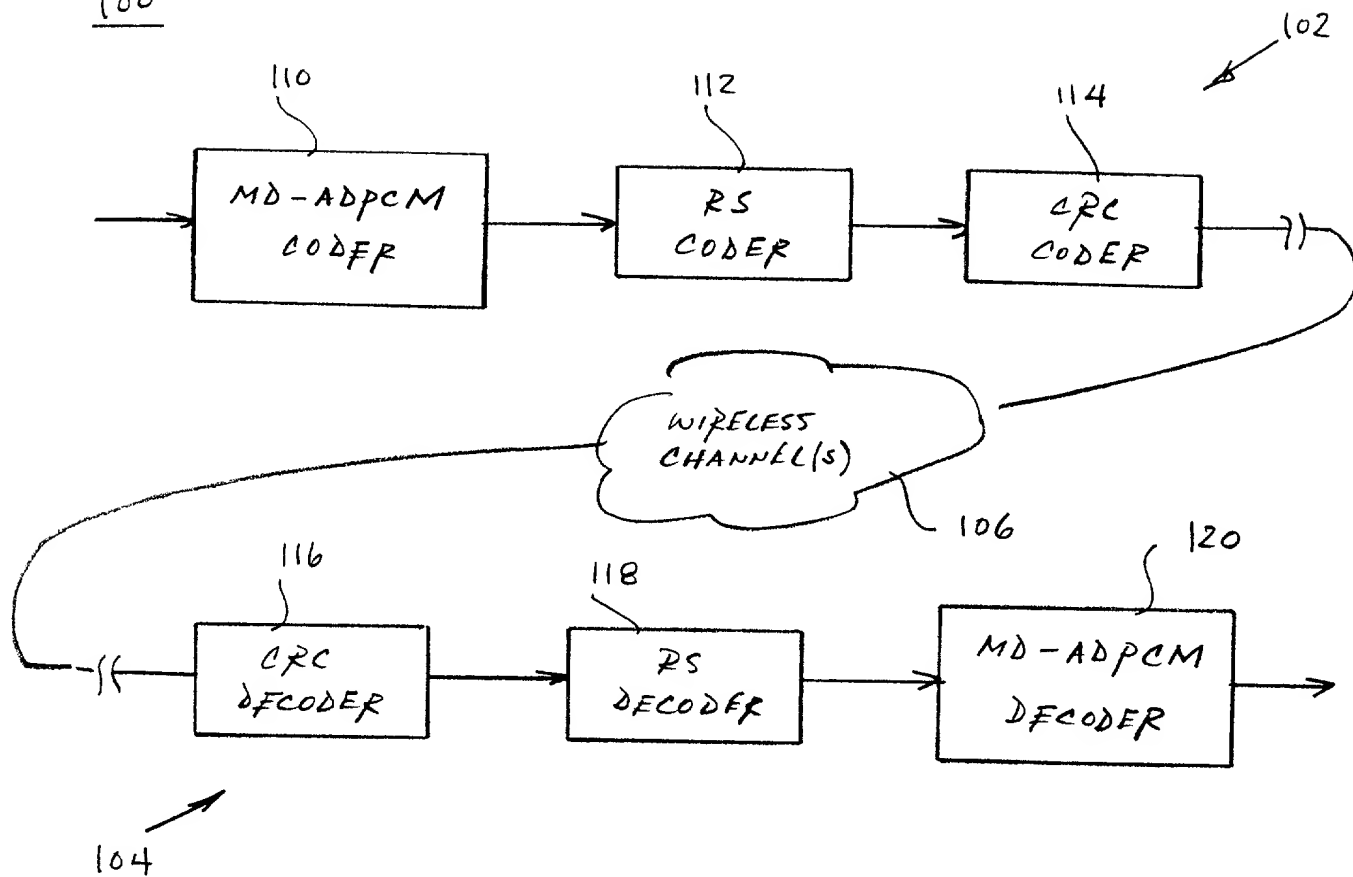


FIG. 1

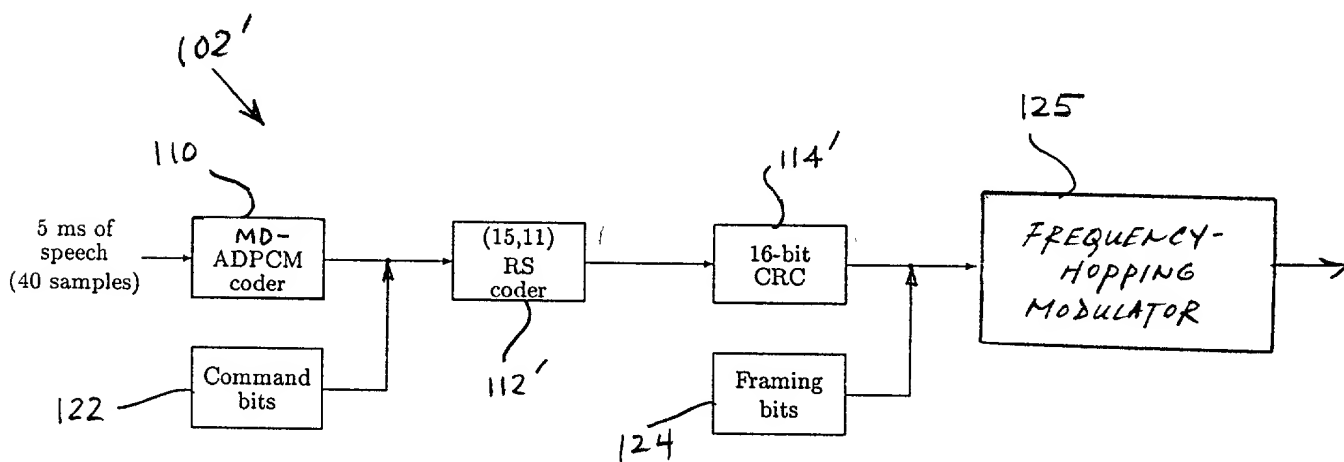


FIG. 2

2/4

				i_1					
		1	2	3	4	5	6	7	8
i_2	1	8	9						
	2		10	11					
	3			12	13				
	4				14	15			
	5					1	2		
	6						3	4	
	7							5	6
	8								7

FIG. 3A

i_1	$ I(k) $	DS	DLN	DQS	DQLN	Output	$W[I(k)]$	$F[I(k)]$	$*i$
1	8	1	400-2047	1	425	3.32	70.13	7	8
2	9-10	1	300-399	1	348	2.72	14.31	3	10
3	11-12	1	178-299	1	243	1.90	4.56	1	12
4	13-14	1	3972-4095 0-177	1	69	0.54	1.38	0	14
5	15 1 1	0/1 0 0	2048-3971 3972-4096 0-79	0	4	0.031	-0.75	0	15
6	2-3	0	80-245	0	174	1.36	2.81	1	2
7	4-5	0	246-348	0	298	2.33	8.06	1	4
8	6-7	0	349-2047	0	399	3.12	31.75	6	6

FIG. 3B

i_2	$ I(k) $	DS	DLN	DQS	DQLN	Output	$W[I(k)]$	$F[I(k)]$	$*i$
1	8-9	1	349-2047	1	399	3.12	31.71	6	9
2	10-11	1	246-348	1	298	2.33	8.06	1	11
3	12-13	1	80-245	1	174	1.36	2.81	1	13
4	14 14 15	1 1 0/1	3972-4095 0-79 2048-3971	1	4	0.031	-0.75	0	15
5	1-2	0	3972-4095 0-177	0	69	0.54	1.38	0	1
6	3-4	0	178-299	0	243	1.90	4.56	1	3
7	5-6	0	300-399	0	348	2.72	14.31	3	5
8	7	0	400-2047	0	425	3.32	70.13	7	7

FIG. 3C

3/4

		i_2			
		1	2	3	4
i_1	1	8	9		
	2	10	11		
	3	12	13		
	4	14	15		
	5			1	
	6			2	3
	7			4	5
	8			6	7

FIG. 4A

i_1	$ I(k) $	DS	DLN	DQS	$DQLN$	Output	$W[I(k)]$	$F[I(k)]$	$*i$
1	8-9	1	349-2047	1	399	3.12	31.75	6	9
2	10-11	1	246-348	1	298	2.33	8.06	1	11
3	12-13	1	80-245	1	174	1.36	2.81	1	13
4	14	1	3972-4095	1	4	0.031	-0.75	0	15
	14	1	0-79						
	15	0/1	2048-3971						
5	1	0	3972-4096	0	4	0.031	1.13	0	1
	1	0	0-79						
6	2-3	0	80-245	0	174	1.36	2.81	1	2
7	4-5	0	246-348	0	298	2.33	8.06	1	4
8	6-7	0	349-2047	0	399	3.12	31.75	6	6

FIG. 4B

i_1	$ I(k) $	DQS	$DQLN$	Output	$W[I(k)]$	$F[I(k)]$	$*i$
1	8, 10, 12, 14	1	241	1.88	7.5	2	12
2	9, 11, 13, 15	1	195	1.52	3.44	1	13
3	1, 2, 4, 6	0	176	1.38	3.44	1	2
4	3, 5, 7	0	320	2.5	7.5	2	3

FIG. 4C

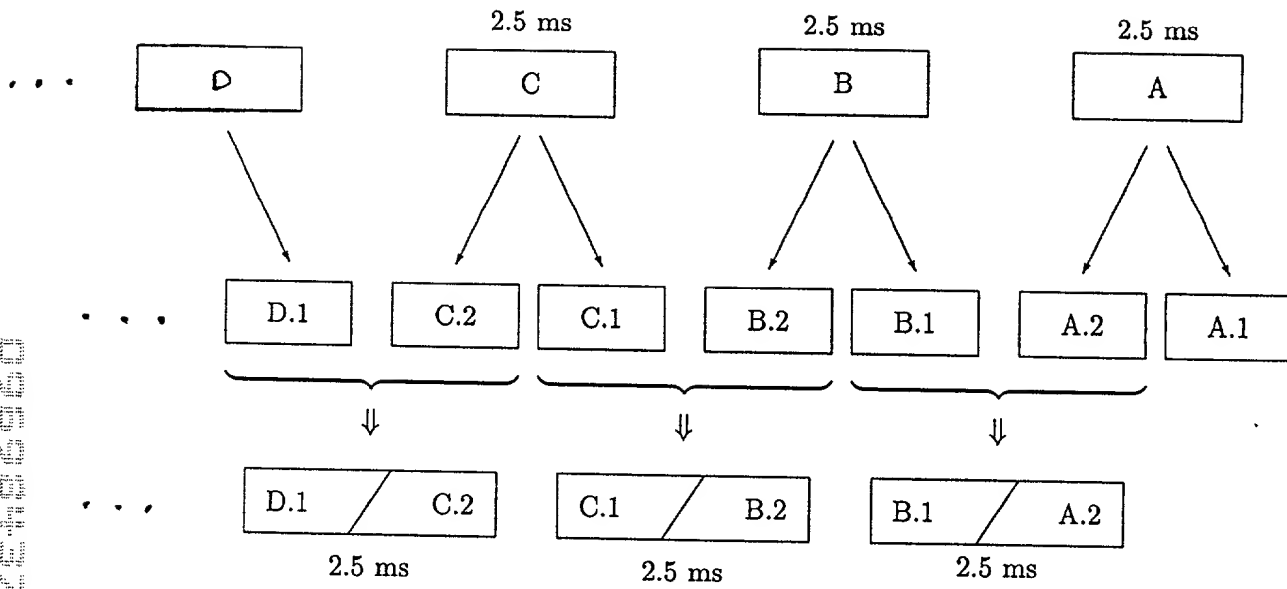


FIG. 5